




BIJUR DELIMON
INTERNATIONAL

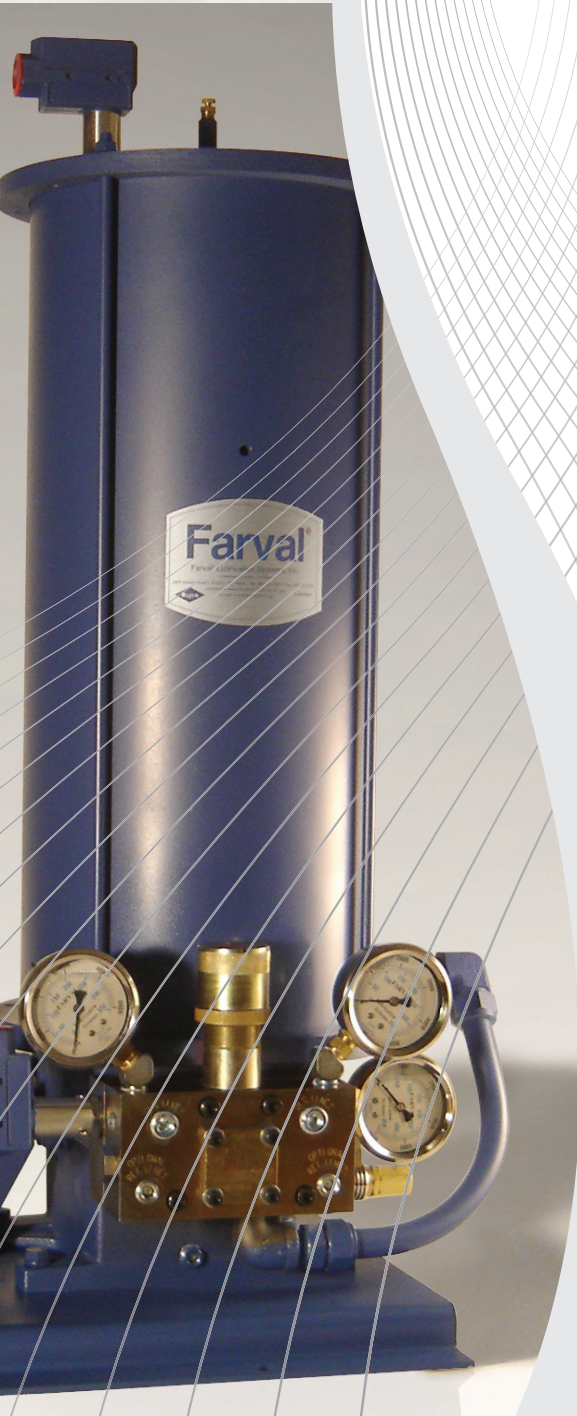

FARVAL[®]
DUALINE[™]
SYSTEMS

- + Ideally suited for heavy industry
- + Continuous duty operation
- + More than half a century of excellence

Contents

Introduction	3
---------------------------	----------

Dualine Systems	4
------------------------------	----------

Multiple Valve Manifold and Grease Gun.....	4
---	---

Motor Driven Piston Pump System.....	4
--------------------------------------	---

Air Powered System.....	5
-------------------------	---

Manual Lubricator System	5
--------------------------------	---

Dualine Valves.....	6
----------------------------	----------

DD & DM Valves	6
----------------------	---

DDM & SDM Modular Valves	8
--------------------------------	---

DX Valve Manifold.....	10
------------------------	----

Lubricators.....	11
-------------------------	-----------

DA Series Manual Lubricators.....	11
-----------------------------------	----

Air-operated Barrel Pumps.....	12
--------------------------------	----

Reversing Valves	14
-------------------------------	-----------

FR10.....	14
-----------	----

DR1000	14
--------------	----

DR4-5.....	14
------------	----

SA-V.....	15
-----------	----

Central Stations	16
-------------------------------	-----------

CS1000	16
--------------	----

CS2000	16
--------------	----

DC36	16
------------	----

DC41 & DC42	16
-------------------	----

BM-B & BS-B.....	18
------------------	----

Controllers.....	20
-------------------------	-----------

SS4500	20
--------------	----

SS2200	20
--------------	----

Spray Systems	22
----------------------------	-----------

INSURES LUBRICATION
OF EVERY BEARING
AND SLIDE • PREVENTS
OVER AND UNDER
LUBRICATION • SAVES
LUBRICATION TIME •
ELIMINATES LUBRICANT
CONTAMINATION •
PREVENTS PERSONAL
INJURY HAZARDS •
PROMOTES CONTINUOUS
HIGH SPEED MACHINE
OPERATION • REDUCES
REPAIRS AND
DOWNTIME • PROLONGS
MACHINE LIFE •
INCREASES
PRODUCTION OUTPUT •
REDUCES
OPERATING COST

Introduction

Dualine lubricating systems are found in virtually every industry in which continuous duty operation is required. From steel production to pulp and paper, from mining equipment to machine tools, automatic application of the lubricant provides significant benefits to the equipment user. There are several components that are used in designing a Dualine system:

- + Valves
- + Lubricators
- + Reversing Valves
- + Central Stations
- + Controllers
- + Spray Systems

Valves

Measuring valves are the heart of Dualine lubrication systems. They are mounted close to the lubrication points and are hydraulically operated by pressure from the first and then the second of the two supply lines. On each pressurization cycle, they indirectly discharge fixed volumes of lubricant to the bearing or lubrication point.

Lubricators

Manual and pneumatic lubricators store and pump lubricant to divider valves throughout the system.

Reversing Valves

These valves change the flow and direction of pressure, which causes divider valves in the system to cycle.

Central Stations

Central stations include lubricator, cycle switch and reversing valve. Some versions are mounted on a plate for easier installation.

Controllers

Programmable controllers give you access to key system functions, such as system on and off, and can control what happens when there is a problem in the system.

Spray Systems

Used to lubricate large gears and pinion sets.

Advantages of Dualine Systems

- + They are economical for a system having more than 20 bearing points.
- + Lubrication points can be added easily without redesigning the total system.
- + A blockage between main line and bearing will not shut the system down; remaining bearings will continue to be lubricated.
- + There are positive lubrication indicators for each bearing point.
- + They have the ability to positively displace a broad range of lubricants from light oil to #2 grease.
- + Lubrication discharge volume at each bearing is fully adjustable even after start-up.

Dualine Systems


There are several various types of Dualine systems that can be designed using Bijur Delimon components featured in this brochure. Flexibility is a key part of the Bijur Delimon product family. The following represent typical system layouts.

Multiple Valve Manifold and Grease Gun

Basic lubrication of a system can be achieved with this system layout. It utilizes a DX valve manifold and a manual or battery-powered grease gun.

Relevant products include:

- + DX Valve Manifold (page 10)
- + Manual Grease Gun (see *Datasheet #1200* and *Datasheet #1220*)
- + Battery-powered Grease Gun (see *Operators Manual #35491: Battery-powered Grease Gun*)

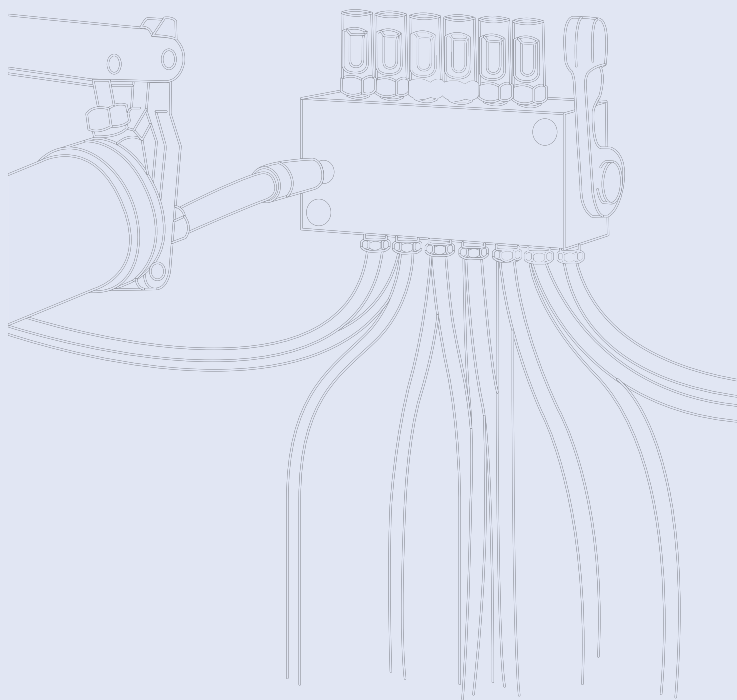


Motor Driven Piston Pump System

One of the most popular Dualine systems features Dualine valves, a central station (pump, cycle switch and reversing valve) and a controller.

Relevant products include:

- + DD Valves, DM Valves or DDM/SDM Modular Valves (pages 6-9)
- + Central Stations (pages 16-19)
- + Controllers (pages 20-21)

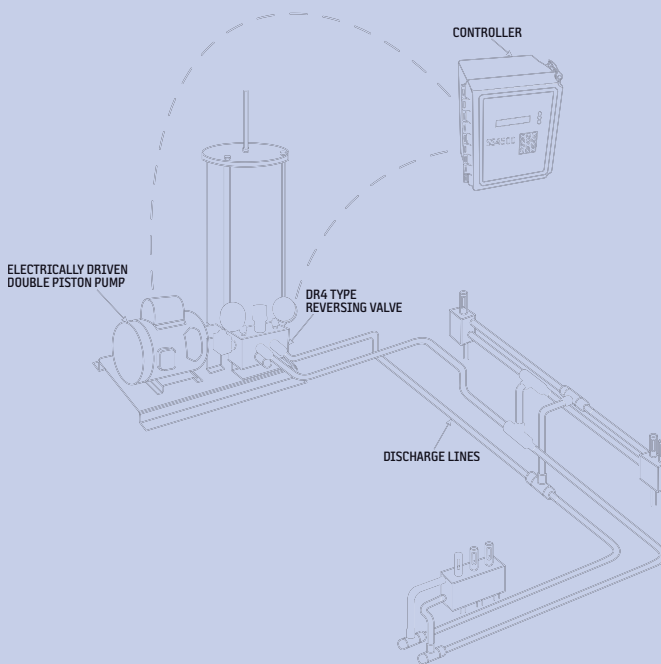


Air Powered System

Another popular Dualine system utilizes an air-operated barrel pump providing lubricant to Dualine valves in the system. A reversing valve with a pressure gauge is utilized to reverse the lubrication flow in the system. A controller is also used to monitor system functionality. (See a variation of this system layout, *Spray Systems*, on pages 22-23.)

Relevant products include:

- + DD Valves, DM Valves or DDM/SDM Modular Valves (pages 6-9)
- + Air Operated Barrel Pump (page 12-13)
- + Air Control Panel (see components on page 13)
- + Reversing Valve (pages 14-15)
- + Controllers (pages 20-21)

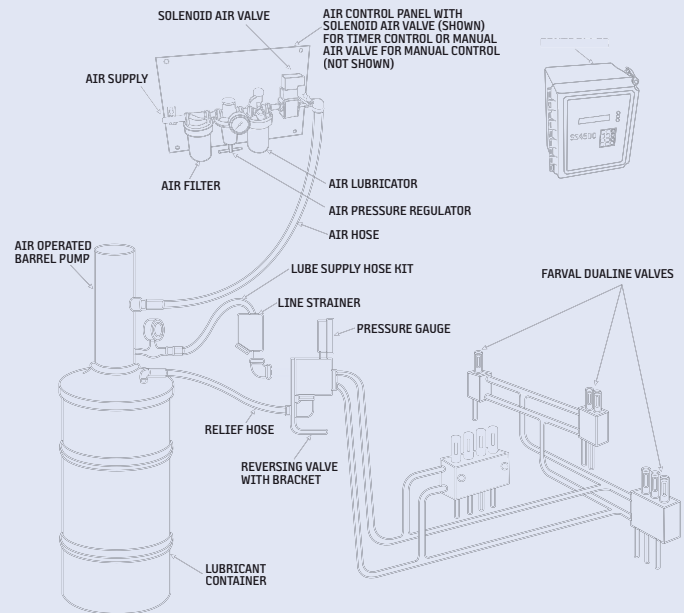


Manual Lubricator System

Bijur Delimon has a complete line of manual lubricators that can be affixed to DD, DM or DDM/SDM Dualine valves. The lubricators have a built-in reversing valve so that pressure can be applied and released on each handle stroke.

Relevant products include:

- + DD Valves, DM Valves or DDM/SDM Modular Valves (pages 6-9)
- + Manual Lubricators (page 11)





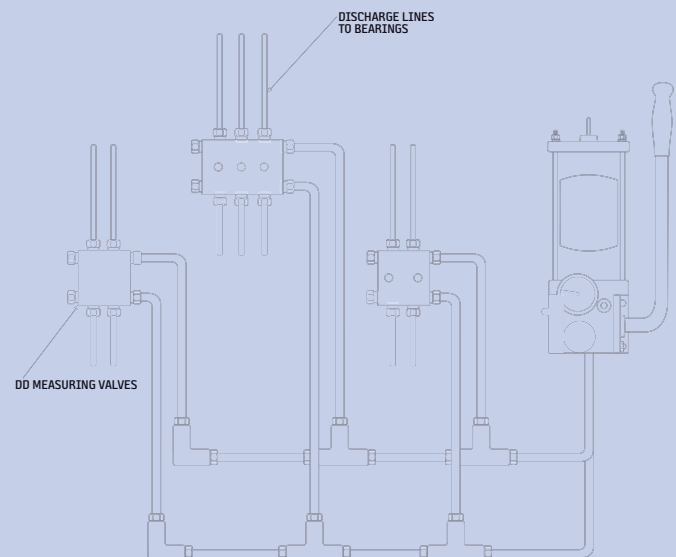



Dualine Valves

DD & DM Valves

Dualine DD and DM lubricating valves are completely hydraulic in operation and will deliver either oil or grease. They are also fully and individually adjustable in regard to discharge quantity and are equipped with operational indicators. Each DD valve serves two bearings; however, by a simple method of cross-porting, it will serve one. Therefore, a four valve block, as an example, can actually serve anywhere between four and eight bearings. DM series valves always have one discharge port per valve section located on the bottom of the valve. DD and DM valves can be supplied in several basic discharge capacities and are available in blocks consisting of one, two, three or four valves.

Benefits

No springs or check valves.		Positive indication at every bearing.	
No small ports.		Has only two moving parts.	
No system redesign when adding or subtracting points.		Individually adjustable.	




Micro Switch Kits


Description	Part #
DM30 series	KIT13025B
DM60 series	KIT13009B
DD50 & DM50 series	KIT13014B
DM60 series w/ NEMA 4 switch	KIT13009B4
DD50 & DM50 w/ NEMA 4 switch	39145

Note: Need one kit for each indicator pin.

DD Valves

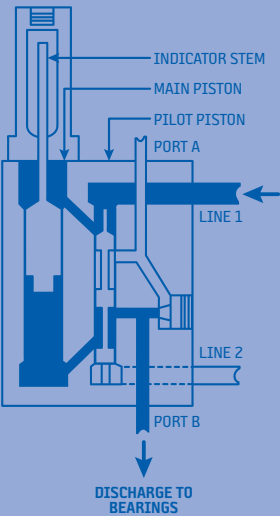

DM Valves

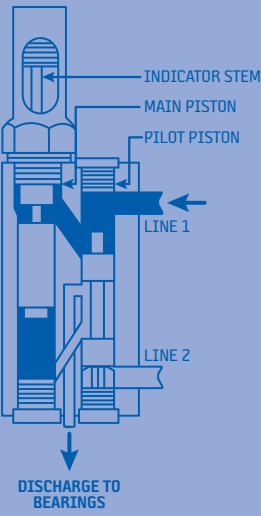

How it Works

Pressurized lubricant entering the valve forces the pilot piston down, allowing pressure to be applied to top of the main piston. The main piston begins to move down under pressure, forcing lubricant from its chamber, past the lower land of the pilot piston and out the discharge line to the bearing. When pressure in the supply line is reversed, lubricant then enters valve and forces the pilot piston up, allowing pressure to be applied to bottom of main piston, which begins to move up, forcing lubricant from its chamber, past the upper land of the pilot piston and out the second discharge line to the bearing.

Valve Output

Model	Discharge per piston stroke		Discharge change per adj. screw revolution	Total adj. range
	Minimum	Maximum		
DD-2X	.006 cu. in. (.09cc)	.036 cu. in. (.59cc)	.002 cu. in. (.03cc)	0.45" (11mm)
DD-5X	.011 cu. in. (.18cc)	.289 cu. in. (4.74cc)	.011 cu. in. (.18cc)	1.21" (30mm)
DM-3X	.012 cu. in. (.19cc)	.072 cu. in. (1.18cc)	.005 cu. in. (.08cc)	0.56" (14mm)
DM-4X	.036 cu. in. (.09cc)	.135 cu. in. (2.21cc)	.007 cu. in. (.11cc)	0.69" (17mm)
DM-5X	.075 cu. in. (1.23cc)	.306 cu. in. (5.02cc)	.010 cu. in. (.16cc)	1.12" (28mm)
DM-6X	.180 cu. in. (2.95cc)	.800 cu. in. (13.11cc)	.039 cu. in. (.64cc)	0.97" (24mm)

Note: All DD & DM valves are rated to 3500 psi (240 bar) max.

How to Order

Lube points (#)	Basic valve without connectors	Basic valve with U-81-XX connectors	Basic valve without indicator stem	Basic valve
2	DD22-250	DD22-250T ¹	DD22-251	DD22-251T ¹
4	DD24-250	DD24-250T ¹	DD24-251	DD24-251T ¹
6	DD26-250	DD26-250T ¹	DD26-251	DD26-251T ¹
8	DD28-250	DD28-250T ¹	DD28-251	DD28-251T ¹
2	DD52-250	DD52-250T ²	DD52-251	DD52-251T ²
4	DD54-250	DD54-250T ²	DD54-251	DD54-251T ²
6	DD56-250	DD56-250T ²	DD56-251	DD56-251T ²
8	DD58-250	DD58-250T ²	DD58-251	DD58-251T ²
10	DD510-250	DD510-250T ²	---	---
12	DD512-250	DD512-250T ²	---	---
12	DD512C-250 (BSP)	---	---	---
1	DM31-100	DM31-100T ²	---	---
2	DM32-100	DM32-100T ²	---	---
3	DM33-100	DM33-100T ²	---	---
4	DM34-100	DM34-100T ²	---	---
1	DM41-100	DM41-100T ²	---	---
2	DM42-100	DM42-100T ²	---	---
3	DM43-100	DM43-100T ²	---	---
4	DM44-100	DM44-100T ²	---	---
1	DM51-100	DM51-100T ²	---	---
2	DM52-100	DM52-100T ²	---	---
3	DM53-100	DM53-100T ²	---	---
4	DM54-100	DM54-100T ²	---	---
1	DM61-100A	DM61-100AT ²	---	---
2	DM62-100A	DM62-100AT ²	---	---
1	DM62-101A ³	DM62-101AT ²	---	---


¹ Supply 1/4" tube; discharge 3/16" tube ² Supply 3/8" tube; discharge 1/4" tube ³ Discharge supply 2 x DM61

When ordering, specify by name, lube points and part number, e.g. DM Valve without connectors, 3 lube points, Part #DM33-100.

Typical Layout

DD Valve


A typical four valve DD block with six discharge ports. The valves can easily be converted from dual to single discharge by a cross porting kit. Valve can be reconverted later to dual discharge.

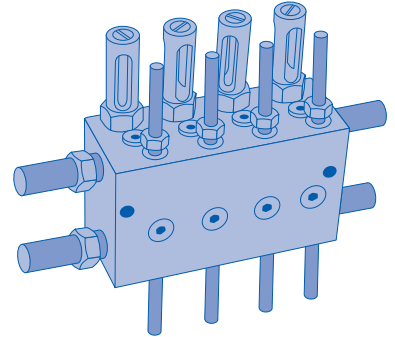

1. Brass housing standard
2. Solid copper crush washers for superior sealing
3. Viton seals standard 350°F (163°C)
4. Easy ID if using single or dual outlet plugs
5. Stainless steel indicator pins standard
6. NPT or BSP outlets available will accept all standard fittings and U81 fittings
7. 10,000 psi rated Koenig plugs used to seal machining ports
8. Solid pin connection to main piston
9. Available in 1-12 lubrication outlets

DM Valve

A typical one valve DM block. Valve has a discharge port on the bottom. A four valve block would have four discharge ports.



1. Supply ports from pump
2. Adjustment screw (varies valve output)
3. Indicator stem (shows that valve is operating)
4. Check valve (required in discharge port of some oil systems)



DDM & SDM Modular Valves

Dualine DDM and SDM lubricating valves have many advantages over traditional line mounted models. All working parts are in the module and these modules are fitted to base manifolds which are permanently fitted to the centralized lubrication system. The double discharge module DDM feeds two lubrication points on alternative system cycles while the single discharge module SDM feeds a single lubrication point on each cycle.

A mixture of double and single discharge modules can be fitted to each manifold either for assembly to serve an odd number of bearings or to give a greater lubricant quantity to selected points. Three sizes of modules can be supplied to cover a wide range of metered application volumes.

Benefits

- + Modules can be individually adjusted within its capacity to suit bearing requirements.
- + A malfunctioning module can be changed in seconds, reducing maintenance time and costs.
- + Positive hydraulic operation – Within design limitations, these valve assemblies can be mounted long distances from the central pumping station.
- + Visual indicator showing operation of each module.
- + Body protected by corrosion resistant electrophoretic paint.

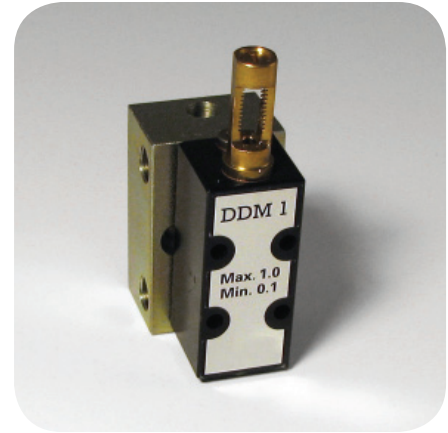

Technical Data

Maximum supply pressure	5075 psi (350 bar)		
Temperature range	-5°F to 248°F (-20°C to 120°C)		
	-5°F to 194°F (-20°C to 90°C)		
Lubricant	Oil or grease (NLGI #3 max)		
Materials	Body	Steel – Electrophoretically painted	
	Pistons	Hardened steel	
	Packing gland	DDM1/SDM1, DDM5/SDM5 – Brass	
		DDM15/SDM15 – Steel	
	Seals	DDM1/SDM1; DDM5/SDM5 – Viton	
		DDM15/SDM15 – Nitrile	
	Indicator stem	Stainless steel	
Discharge per outlet per double cycle	Valve size	Maximum (cc)	Minimum (cc)
	DDM1	0.06 (1.0)	0.006 (0.1)
	SDM1	0.12 (2.0)	0.012 (0.2)
	DDM5	0.31 (5.0)	0.031 (0.5)
	SDM5	0.61 (10.0)	0.061 (1.0)
	DDM15	0.92 (15.0)	0.183 (3.0)
	SDM15	1.83 (30.0)	0.366 (6.0)

Manifolds

Three ranges of base manifolds suitable for mounting the modular measuring valves, DDM1, SDM1, DDM5, SDM5, DDM15 and SDM15.

Benefits

- + Manifolds can be permanently fixed to the lubrication system pipe work before valves are fitted, reducing possibility of contamination during installation period.
- + O-ring recesses are fitted into the top of the adapter so that the fitter can observe the condition of O-rings when he is fitting the module.
- + Manifolds are available in various sizes for multiple module configurations.

How to Order

DDM/SDM modular valves and manifolds feature a smart part number ordering system, where you can tailor the modular valves and manifold to meet your needs.

For modular valves:

First, choose the module type, valve size and visual indicator you need. Then, put the numbers into the corresponding squares in the easy-to-use grid.

Example: To order a DDM1 modular valve with double indicator and a visual indicator with cover, you would use Part #DDM11A0100.

For manifolds:

First, choose the manifold type and number of outlets. Then, put the numbers into the corresponding squares in the easy-to-use grid.


Example: To order a MA1 manifold with 8 outlets, you would use Part #MA108A00.

You now have the customized part numbers for both your modular valve and manifold.


For mounting kits:

When ordering mounting kits, specify by description, name and part number listed in the table, e.g. DDM1 Mounting Kit, Part #DDM500001E.

Modular Valves

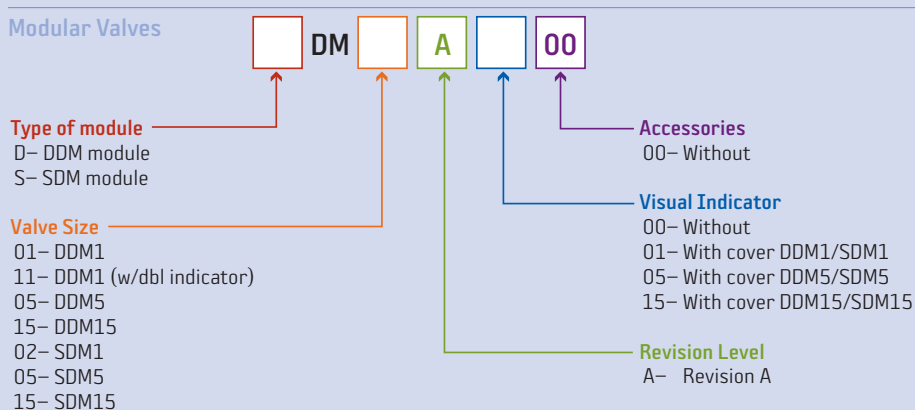

Manifolds

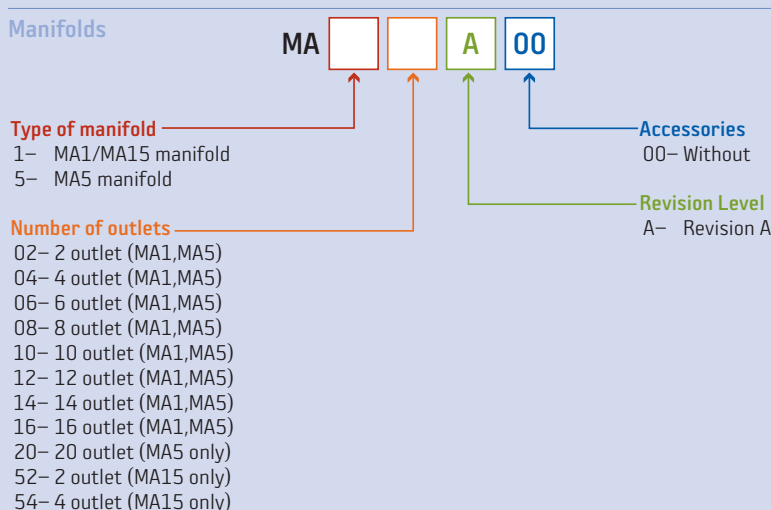

Mounting Kits

Name	Type	Description	Part #
Mounting Kits	Valve ¹	DDM1/SDM1	DDM500001E
		DDM5/SDM5/DDM15/SDM15	DDM150012
	Manifold ²	MA1	MA102204E
		MA5/MA15	MA515022003E

¹ One kit is required per valve. Each kit includes 4 screws and 4 O-rings.

² One kit is required per manifold. Each kit includes 2 screws and plugs.

DX Valve Manifold

The DX multiple valve manifold is designed for use with any conventional, portable type, lubrication gun to serve a limited number of bearings where the installation of a complete central station would not be justified. This unit is being widely used for lubrication of materials handling equipment, trucks, inclinable and single crank presses, machine tools and on both large and small pieces of equipment having isolated groups of bearings.

These systems provide low cost centralized lubrication to small groups of 2 to 12 bearings. Each DX Multiple Valve Manifold, together with any conventional portable type lubrication gun, serves both as a central station and a measuring valve. This system offers the following advantages:

- + Reduction in the number of lubrication gun connections required.
- + Lubrication from a safe, convenient central point.
- + Control of quantity of lubricant going to the bearings – the amount delivered to each bearing is adjustable.

There are five groups of DX Valve Manifolds. The valve groups may be identified by the number of indicator-piston assemblies. Within each group, the only variation is in the number of active discharge ports.



How to Order

When ordering, specify name, active ports and part number, such as: DX Manifold, Basic with 8 active ports, **Part #DX38-100**.

Name		Active Ports	Part #
DX Manifolds	Basic	4	DX34-100
		6	DX36-100
		8	DX38-100
		10	DX310-100
		12	DX312-100
	With U-81-B1 (1/4") tube fittings for each active port	4	DX34-100T
		6	DX36-100T
		8	DX38-100T
		10	DX310-100T
		12	DX312-100T

Lubricators

DA Series Manual Lubricators

To support the successful operation of Dualine measuring valves and to ensure their performance, Bijur Delimon has designed equally rugged pumping units which provide a dependable high-pressure source of lubricant supply.

For bearings that require an application of lubricant once or twice per shift, a manually-operated central pumping unit is used. These units consist of a double-acting piston pump, reciprocated by a hand lever through a rack-and-gear segment. A quick-fill connection provides a convenient means of filling the reservoir, and an inlet filter screen gives added protection against the entry of dirt. They may be located on the machine being lubricated or at any convenient point nearby. When the lubricant is oil, a float with oil level rod replaces the grease follower plate. Three sizes of reservoirs provide a supply of lubricant adequate for the number of bearings being lubricated.

Technical Data

Reservoir Capacity	Grease	2 kg (4.5 lb), 4 kg (8.25 lb), 6 kg (12.5 lb)
	Oil	2.4 liter (2.5 qt)
Discharge		7.4cc (0.45 cu. in.)
Viscosity Range	Grease	NLGI #000 - NLGI #2
	Oil	N68 and upwards
Internal Filter		Available on all models
Pressure Gauge		Available on all models
Cycle Indicator		Available on some models



How To Order

When ordering, specify by name, lubricant, reservoir capacity and part number, e.g. DA manual lubricator, grease, 12.5 lb reservoir, **Part #DA6101AC**.

Name	Lubricant	Reservoir Capacity	Part #
DA Manual Lubricator	Grease	2 kg (4.5 lb)	DA4101AC
		4 kg (8.25 lb)	DA5101AC
		6 kg (12.5 lb)	DA6101AC
	Oil	2.4 liter (2.5 qt)	DA4101B

Air-operated Barrel Pumps

Air-operated barrel pumps are used where medium to heavy duty service conditions exist and rapid build-up of lubricating system pressure is desired in either air-operated central stations or bulk transfer of lubricants. Air-operated barrel transfer pumps are normally used to transfer lubricants from original refinery drums to the reservoirs on central lubrication systems.

Notes

- + Built-in air exhaust muffler is standard on all pumps.
- + Grease pumps incorporate an inlet strainer.
- + Bung adapter is included with all pumps.
- + Part #9035, #9120 and #9400 all include return tube (hose on #9035) to bottom of drum.
- + Part #9035 includes a drum cover and follower plate.
- + Part #9120 includes a drum cover.
- + See *Catalog #27539: Industrial Lubrication* for complete pump offering.



Technical Data

	9035	9120	9400	F216	F218	F206	F208	F406	F408
Max. Delivery*	40 cu. in. (650cc)	40 cu. in. (650cc)	40 cu. in. (650cc)	16 GPM (62 liter/min)	16 GPM (62 liter/min)	8 GPM (31 liter/min)	8 GPM (31 liter/min)	10 GPM (38 liter/min)	10 GPM (38 liter/min)
Air Inlet	1/4" NPT	1/4" NPT	1/4" NPT	1/4" NPT	1/4" NPT	1/4" NPT	1/4" NPT	3/8" NPT	3/8" NPT
Lube Outlet	3/8" NPT	3/8" NPT	3/8" NPT	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT	1" NPT	1" NPT
Height	24" (610mm)	36.5" (925mm)	44" (1120mm)	41" (1041mm)	50" (1270mm)	41" (1041mm)	50" (1270mm)	44.5" (1130mm)	53.5" (1359mm)
Weight	24 lb	27 lb	21 lb	13 lb	15 lb	14 lb	16 lb	20 lb	22 lb


* Max delivery for grease pumps, free delivery with NLGI #2 grease @ 70°F (20°C) with 100 psi (7bar) air pressure. For transfer pumps, free delivery with SAE 20 oil @ 70°F (20°C) with 100 psi (7bar) air pressure.

How to Order

When ordering, specify name, type, ratio, drum size and part number, e.g.

Air-operated Barrel Pump, Oil, 3:1 Ratio, 55 Gallon Drum, Part #F208.

Name	Pump Type	Ratio	Drum Size	Part #
Air-operated Barrel Pump	Grease	55:1	35 lb	9035
			120 lb	9120
			400 lb	9400
	Oil Transfer	1:1	16 gallon	F216
			55 gallon	F218
		3:1	16 gallon	F206
			55 gallon	F208
		5:1	16 gallon	F406
			55 gallon	F408

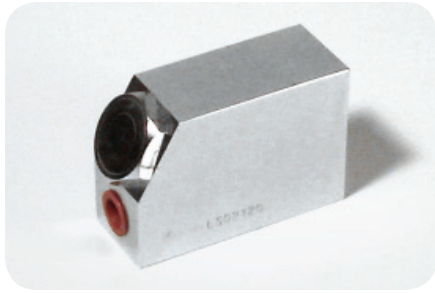


Line Strainers

Line Strainers remove foreign particles from grease and oil lines in lubricating systems.

How to Order

Line strainers feature a smart part number ordering system. First, choose the pipe tap size, dirty screen indicator, usage and micro switch option. Then, put the numbers into the corresponding squares in the easy-to-use grid. You now have the customized part numbers for your line strainer.

Example: To order a Line Strainer with 1/4" NPT, with dirty screen indicator and 25 micron screen, you would use Part #LS-02-203.

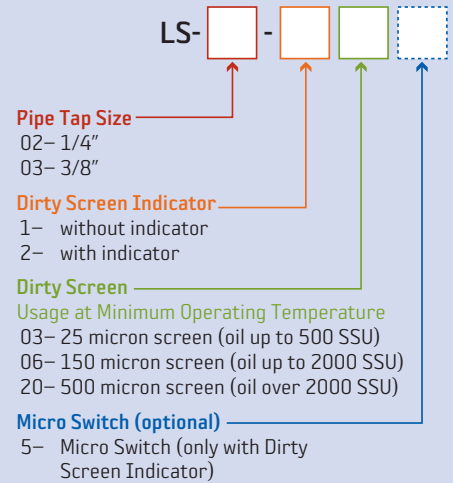

Accessories

Name	Description	Part #
Steel follower plates	Follower for 35 lb pail	F962
	Follower for 120 lb drum	F964
	Follower for 400 lb drum	F966
Drum covers	Heavy duty cover for 35 lb pail	F1934
	Heavy duty cover for 120 lb drum	F1936
	Heavy duty cover for 400 lb drum	F1938
Low level switch kit*	Low level switch for 120 lb drum	LC10243
	Low level switch for 400 lb drum	LC11036
Air regulators and gauges	1/2" regulator with 0-250 psi range 2" 0-160 psi pressure gauge	F976
	3/8" regulator with 0-250 psi range 2" 0-160 psi pressure gauge	F973
Filters	1/2" filter	F978
	3/8" filter	F975
Lubricators	1/2" lubricator	F977
	3/8" lubricator	F974
Quick coupler and nipples	1/4" NPTF coupler	F930
	1/4" NPTM nipple	F931
	3/8" NPTM nipple	F941
	1/2" NPTF coupler	F940
Filter/Regulator/Lubricator Combination	1/2" filter, 1/2"regulator (0-250 psi), 2" gauge (0-160 psi) and lubricator	F985
	3/8" filter, 3/8"regulator (0-250 psi), 2" gauge (0-160 psi) and lubricator	F984
Line strainers screens	25 micron screen (Oil only up to 500 SSU)	LS-02-05-103
	150 micron screen (Oil only up to 2000 SSU)	LS-02-05-106
	500 micron screen (Oil over 2000 SSU & all grease)	LS-02-05-120

* Requires cover and follower plate, customer/user to provide 15/16" hole in cover, can be used with any style pump.



Drum Cover



Filter/Regulator/Lubricator Combination

Reversing Valves


In a Dualine lubricating system, the reversing valve directs pump flow to one of the two main supply lines while the second supply line is in relief to the pump reservoir. At the completion of each half lubrication cycle, the reversing valve redirects the pump and relief flow. Thus, on each succeeding half lubrication cycle, pressure and relief flow are alternated in the two main supply lines. This action causes the measuring valves to stroke and discharge lubricant to their respective bearings. In an automatic system, the reversing valve also controls maximum system pressure and pump shut down.

FR10


These reversing valves operate in conjunction with pressure switches. They control end-of-line systems (DC41 central stations and air powered systems).

Technical Data

Maximum flow rate	10 GPM (Oil)
Maximum allowable pressure (non-shock)	5000 psi (3000 psi @ relief port)
Spool configuration	2 position, 4 way
Solenoid	Push type epoxy covered coil
Inrush current	17.5 amp
Holding current	1.65 amp
Pressure range	400-3000 psi
Seals	Buna "N" rubber

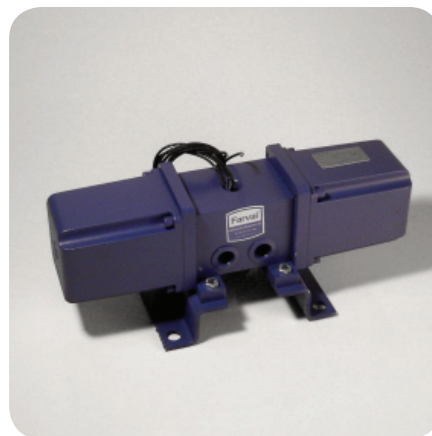

FR10

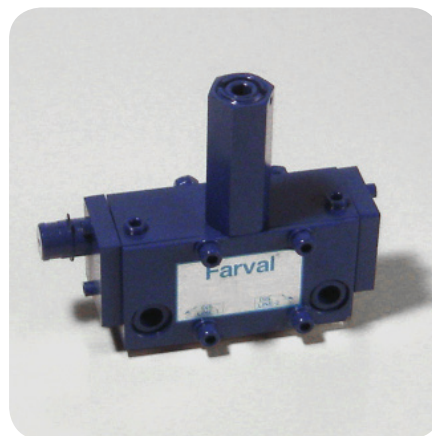

DR1000

DR1000

These reversing valves are activated by system pressure and are adjustable between 500 and 2000 psi. They are supplied on CS1000 central stations and can be used with independent pumps for smaller non-return Dualine systems.

Technical Data


Lubricant	SAE #10 oil to NLGI #1 grease	
Materials	Housing	Low carbon steel
	Piston	Low carbon steel
Pressure Range	500-2000 psi	
Seals	Buna "N" rubber	

DR4-5

These reversing valves are activated by system pressure and are adjustable between 500 and 3500 psi. They control non-return and return systems using CS2000, DC36 and DC42 central stations. They are also used with air barrel pumps for spray and medium and large dualine systems.

Technical Data

Lubricant	SAE #10 oil to NLGI #2 grease	
Materials	Housing	low carbon steel
	Piston	low carbon steel
Pressure Range	500-3500 psi	
Seals	Buna "N" rubber	

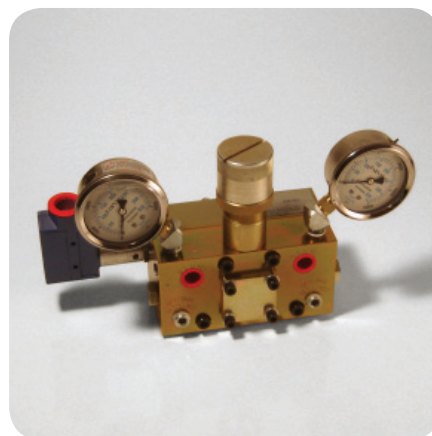

DR4-5

SA-V


This reversing valve is designed for use in hydraulic Dualine systems. It can be used as a 4/2 or a 3/2 valve and is driven by a direct current geared motor.

Technical Data


Maximum operating pressure	5800 psi (400 bar)
Temperature range	-20°C to 80°C
Max. power consumption	42 W
EIC Enclosure Rating	IP-65

SG-A Switching Device

The switching device SG-A must be used in conjunction with the SA-V reversing valve. It is used as a differential pressure switch. When the differential pressure is 50 bar and/or 100 bar, the SA-V releases a pulse for the reversion of the directional control valve or for the monitoring of the system.

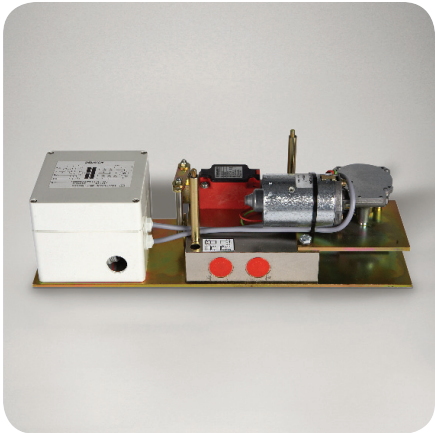

SA-V

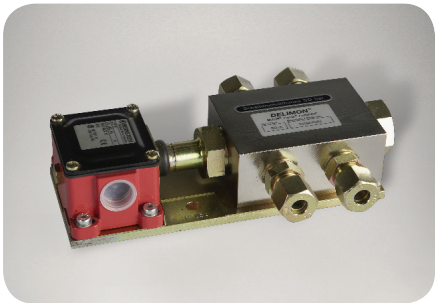

SG-A Switching Device

How to Order

When ordering, specify name, description and part number, e.g. DR1000 Reversing Valve with limit switch and pressure gauges, **Part #LD12226**.

Name	Description	Part #
FR10	120 VAC (60 Hz), not supplied with mounting brackets or hardware.	FR10512060
	460 VAC (60 Hz), not supplied with mounting brackets or hardware.	FR10546060
	110 VAC (50 Hz), not supplied with mounting brackets or hardware.	FR10511050
	220 VAC (50 Hz), not supplied with mounting brackets or hardware.	FR10522050
	120 VAC (60 Hz), supplied on DC41 w/ mounting brackets and hardware.	FR10912060
DR1000	Basic valve.	LD12225
	Valve with limit switch and pressure gauges.	LD12226
	Valve with limit switch, pressure gauges and mounting brackets.	LD12268
DR4-5	Basic valve.	DR45
	Valve with limit switch, pressure gauges and mounting bracket.	DR459
	Valve with limit switch, pressure gauges and line connecting hardware.	DR45K
	Valve with limit switch, pressure gauges, mounting brackets and line strainer.	DR460A ²
	Valve with limit switch, pressure gauges, mounting brackets and line strainer.	DR460B ³
SA-V ¹	110-127 VAC and 200-240 VAC	SAV11A00
	24 VDC	SAV24A00

¹ SGA-A switching device is required for SA-V: 50 bar use Part #SGA05A00, 100 bar use Part #SGA10A00.

² Grease only

³ Oil only

Central Stations

Central stations store, control and supply the lubricant to Dualine systems. The major components are a motor, pump, reservoir and reversing valve.

Central stations are available in 7 series: CS1000, CS2000, DC36, DC41, DC42, BM-B and BS-B. Each series offers a different capability in terms of type and quantity of lubricant which can be handled and type of system that can be served. Each is available with motor and reservoir options and optional high or low level switches as indicated.

CS1000

CS1000 stations store, control and supply the lubricant to systems. They can be used in non-return systems that service small to medium size equipment.

Standard items on these stations include visual level indication, an adjustable relief valve and an electrically driven pump.

CS2000

CS2000 stations store, control, and supply the lubricant to systems. Depending on reservoir size, they can be used in systems that service anything from small machine tools to large machinery in steel mills, or from small to large off road machinery such as power drills, power shovel, and drag lines.

Standard items on these stations include a switch arrangement for automatic level warning systems, visual level indication, an adjustable relief valve and an electrically driven pump. A variety of reservoir types and sizes and a high level warning switch are offered. Kits are also available for mounting controls and NEMA 4 applications.

DC36

DC36 stations store, control, and supply lubricant to systems. The lubricant must be oil with a viscosity of not greater than 1900 SSU at 100°F. DC36 stations can be used in systems that service equipment requiring oil lubrication such as machine tools and transfer equipment.

Standard items on these stations include a low level warning switch for connection to lights or horns, oil level sight gauge, a 30 mesh oil filter and an air breather cap in the oil filler port.

DC41 & DC42

DC41 and DC42 stations can supply either oil or grease to such installations as bar mills, billet mills, blast furnaces, and sintering machines. The two systems differ in the way they alternately pressurize and relieve (reverse) the two supply lines as well as in the way they control maximum system pressure and end the lubrication cycle. On DC41 systems, pressure is controlled by a pressure switch (one is installed in each line) that actuates the reversing valve (FR10) and stops the pump motor when system pressure rises to its setting. On DC42 systems, pressure is controlled by the reversing valve (DR45). The valve opens a micro switch, which stops the pump motor when system pressure rises to its setting. Timer controls for each type tailored to meet its specific requirements are available.



CS2000 pictured

Technical Data

	CS1000	CS2000	DC36	DC41	DC42
Pump Output	3.0 in ³ /min	6.0 in ³ /min	34.6 in ³ /min	33.6 in ³ /min	33.6 in ³ /min
Pump Type	Single Piston	Double Piston	Gear	Double Piston	Double Piston
Max. Work Pressure	1500 psi	3000 psi	1000 psi	2500 psi	2500 psi
Relief Pressure	2000 psi	3500 psi	1500 psi	3000 psi	3000 psi
Gear Ratio-Std.	20:1	10:1	N.A.	10:1	10:1
Pump #	DJ-1000	DJ-2000	U-985-9W	DJ4-5	DJ4-5
Reversing Valve	DR1000	DR4-5	DR4-5	FR10 (SOL type)	DR4-5
Rev. Press-Factory Setting	500 psi	1500 psi	700 psi	N.A. ²	1500 psi
Rev. Press-Range	500-2000 psi	500-3500 psi	500-1000 psi	N.A. ²	500-3500 psi
Motor	Optional	Optional	Optional	Optional	Optional
Motor HP	1/4	1/3	1/3	1	1
Motor Enclosure	Drip Proof	TEFC	TEFC	TEFC	TEFC
Motor Frame Size	48	48	56	143/145T	143/145T
Low Level Switch	No	Yes	Yes	Optional	Optional
High Level Switch	No	Optional	Optional	Optional	Optional
Rev. Valve Limit Switch	Yes	Yes	Yes	No	Yes
Lubricant	Oil/Grease	Oil/Grease	Oil	Oil/Grease	Oil/Grease
System Type	Non-Return ¹	Non-Return ¹	Loop	EOL	Non-Return*

¹ Field Conversion for Loop Operation ² Controlled by end of line pressure switches (see Catalog #1800G: Fittings, Accessories, Regulators and Lubricators)

How to Order

When ordering, specify by model, reservoir and part number, e.g. Central Station CS2000, 10 lb steel reservoir, Part #CS2212.

Model	Reservoir	Level Switches		Part #	
		High	Low	With Motor	Without Motor
CS1000	10 lb plastic			CS1210	---
	10 lb steel			CS1212	---
CS2000	6 gallon steel	X		CS2206	---
		X	X	CS2207	---
	10 lb plastic	X		CS2210	CS2410*
		X	X	CS2211	---
	10 lb steel	X		CS2212	---
	24 lb steel	X		CS2224	CS2424*
		X	X	CS2225	CS2425*
	100 lb steel	X	X	CS22101	CS24101*
DC36	30 gallon steel	X		DC36M-30B	DC36-30B
DC41	100 lb steel	X	X	DC41M-31C	---
	200 lb steel			---	DC41-32A
		X	X	DC41M-32C	DC41-32C
DC42	30 gallon steel	X	X	DC42M-33D	DC42-33D
	100 lb steel	X	X	DC42M-31C	---
	200 lb steel			DC42M-32A	---
		X	X	DC42M-32C	DC42-32C

* Motor Mounting Kit is required for CS2000 without motor: 48 FR use Part #LC10705, 56 FR use Part #LC10706.

BM-B & BS-B

In applications where electricity is available to power the lubricator, our BM-B and BS-B models are ideally suited to be the heart of a lubrication system. These pumps are robust for harsh and severe applications and their compact construction of high-grade steel gives them a long service life. They are ideally suited to service medium- and large-sized machinery. They can also be used for refilling and mobile greasing systems.

BM-B and BS-B lubricators do not ship with a reversing valve. See pages 14-15 for a selection of Bijur Delimon reversing valves. The lubricators are valveless, positive displacement pumps consisting of a series of pistons actuated in a controlled sequence by an eccentric cam. The motion develops a controlled suction and discharge action, producing a rugged, trouble-free lubricator.

A pressure relief valve is standard on both versions. This device can be adjusted to control operating pressure to the rest of the lubrication system. A grease agitator and wedge plate assembly are also standard on the BM-B and BS-B, working the reservoir grease and assisting in lubricator performance. An ultrasonic level switch and pressure gauge are available as optional accessories.

Technical Data

Maximum working pressure		5800 psi (400 bar)	
Discharge	BM-B	2 & 4 liter/h, dependant upon driving speed	
	BS-B	7, 4 & 22 liter/h, dependant upon driving speed	
Maximum outputs, nominal (ref. motor sizes)	BM-B	63 rpm	2.44 cu. in./min. (40cc/min.)
		125 rpm	4.88 cu. in./min (80cc/min.)
	BS-B	80 rpm	7.3 cu. in./min. (120cc/min.)
		160 rpm	14.3 cu. in./min (235cc/min.)
		250 rpm	22.2 cu. in./min. (365cc/min.)
Reservoir capacity	BM-B	8 liter (16.5 lb), 15 liter (31.5 lb) and 30 liter (63 lb)	
	BS-B	60 liter (126 lb), 100 liter (210 lb)	
Suitable grease lubricants		Up to NLGI #2	
Other greases and oils (includes synthetic types)		Consult Bijur Delimon	
Temperature range (ambient)		-5°F to 176°F (-20°C to 80°C)	
Built-in pressure relief value		0 to 5800 psi (0 to 40 bar)	



BM-B





BS-B

How to Order

BM-B and BS-B Lubricators feature a smart part number ordering system, where you can tailor the lubricator to meet your needs. First, choose the gear motor, reservoir capacity and accessories you need. Then, put the numbers into the corresponding squares in the easy-to-use grid. You now have the customized part numbers for your lubricator.

Example: To order a BS-B Lubricator with a 2 hp (160 min⁻¹) 220/240 V flange mounted gear motor, 60 liter reservoir and a level switch, you would use Part #BSB01A030A01.

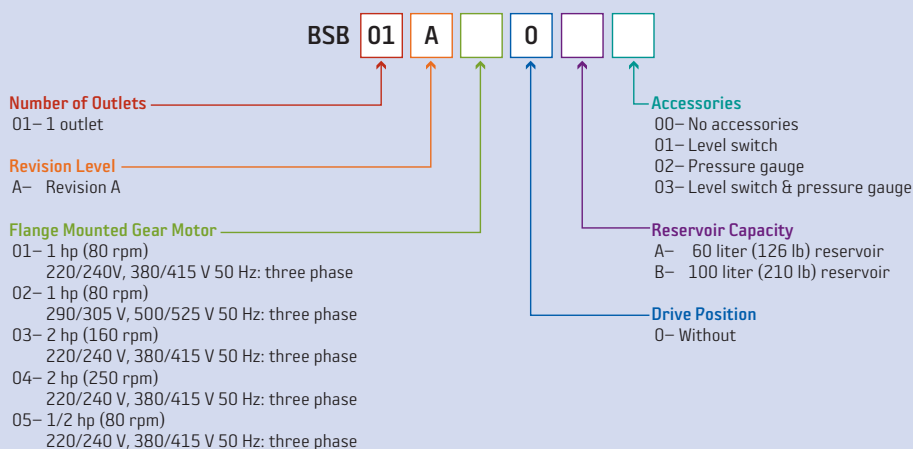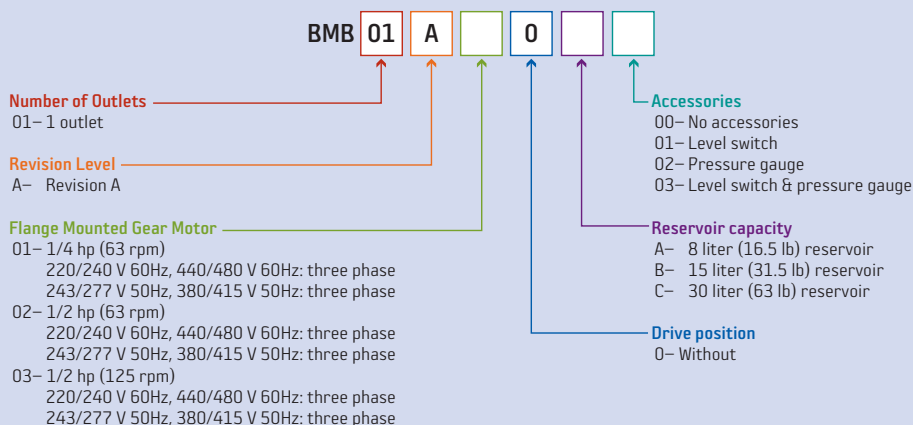

Controllers

SS4500

The SS4500 Multi-Function Controller/Monitor is designed to operate, control and monitor all types of Dualine systems, including those having an electric or hydraulic reversing valve. The unit is easily programmed by the customer via the controller's set up mode.

LEDs on the unit provide remote visual system status and an easy-to-read LCD provides more operating status information. Two fault relays are provided to alert the customer to a controller/lubrication system fault condition (problem) or loss of power to the unit. Two other relays are provided so that the customer can connect the contacts of one relay to an AC device such as a warning light or horn. The contacts of the other relay can be used to signal a DC device such as a PLC or other computerized machine control which normally utilize 24 VDC signals.

Features

- + Nema 4X enclosure, constructed of molded polyester fiberglass.
- + Chemical and temperature resistant and water tight to dripping and sprayed fluid.
- + Large, scratch resistant, Lexan window.
- + Manual lubrication button.
- + Easy-to-use push button program review feature.



SS2200

The SS2200 is a microprocessor-based programmable controller designed to operate single line and Dualine central lubrication systems. The SS2200 is housed in a NEMA 4X polycarbonate enclosure with a transparent cover. Visible through the cover are LED indicators for Idle, Lube and Fault modes, and a three-digit numerical display used for programming and monitoring lubrication system operation.

Features

- + Simple three key programming.
- + Controls both single line and dual line lubrication systems.
- + Operates electric or air driven pumps.
- + Time or machine cycle based operation.
- + Programmable for remote fault indication and emergency machine shutdown.
- + LED indicators and numerical displays monitor system operation.
- + EEPROM permanently stores programming without battery backup.



Technical Data

	SS4500	SS2200
Input Voltage	90 to 250 VAC, 50/60 Hz	115 VAC, 50/60 Hz
Current Consumption	50 mA at 115 VAC (less load) 25 mA at 230 VAC (less load)	---
Pump Output Rating	5 amp (90 to 250 VAC)	Pulsed or continuous, Form A, 115 VAC, 5 amp inrush, 2 amp continuous
Cycle Switch Output	---	12-16 VDC, 12-16 mA DC
Fault Switch Output	---	12-16 VDC, 12-16 mA DC
Line A Output Rating	5 amp (90 to 250 VAC)	---
Line B Output Rating	5 amp (90 to 250 VAC)	---
Switch Input Rating	12 VDC at 25 mA (nominal)	---
Sensor Input Rating	12 VDC at 250 mA (max.) ¹	---
Enclosure Rating	NEMA 4X (IEC 529, IP-56)	NEMA 4X, polycarbonate
Ambient Temp. Range	-10 to 55°C (14 to 131°F)	20°F to 120°F
Storage Temp. Range	-40 to 85°C (-40 to 185°F)	---
Vibration	2 g at resonant (3 axis)	1.5 g
Idle Time Range	1 second to 100 days	1-999 min, 1-999 hour, 1-999 or 10-9990 machine counts
Machine Cycle Counts	1 to 999,000 Counts (30 counts/second at 50% duty cycle)	---
Watchdog Timer	1 second to 60 minutes	---
Monitor Time	1 second to 24 hours	---
Timing Accuracy	0.01% (crystal controlled)	---
Cycle Counts On	1 to 99 counts	1 to 99 counts
Over Counts	0 to 9	---
Net Weight	5 lb	---
Length x Width x Height	10.5" x 9" x 6.25"	---
Permanent Memory	---	EEPROM (no battery)
Fault Relay Contacts	---	2 amp, 125 VAC

¹ Use 10 to 30 VDC, NPN, NO Proximity Switch for Sensor Inputs

How to Order

When ordering, specify by name, voltage and part number, e.g. SS4500, 90-250 VAC, Part #SS4500.

Name	Voltage	Part #
SS4500	90-250 VAC	SS4500
SS2200	115 VAC	SS2200
	12-30 VDC	SS2200DC


Spray Systems

Spray systems are used to lubricate large gears and pinion sets such as those found on ball mills, rod mills, kilns, etc. Each system includes an air operated pumping station (items 1 through 10 below), a measuring valve panel (item 11), a spray nozzle lance (item 12) and electrical controls (item 13).

Gear face widths of 2" to 42" can be lubricated by nozzles with appropriate spacing on the spray lance. Since gear spray systems operate intermittently, they can be thought of as film maintaining devices. The electrical controls provide broad cycling flexibility as well as fault monitoring and afterblow to purge the nozzles.

Thirteen items are required to complete a Dualine spray system. Items 1 through 10 are listed below. The Spray Lance (item 12) should be selected based on gear face width. The Valve Panel (item 11) should be selected based on the number of spray nozzles required. The SS4500 controller is described in detail on pages 20-21.

Typical Layout

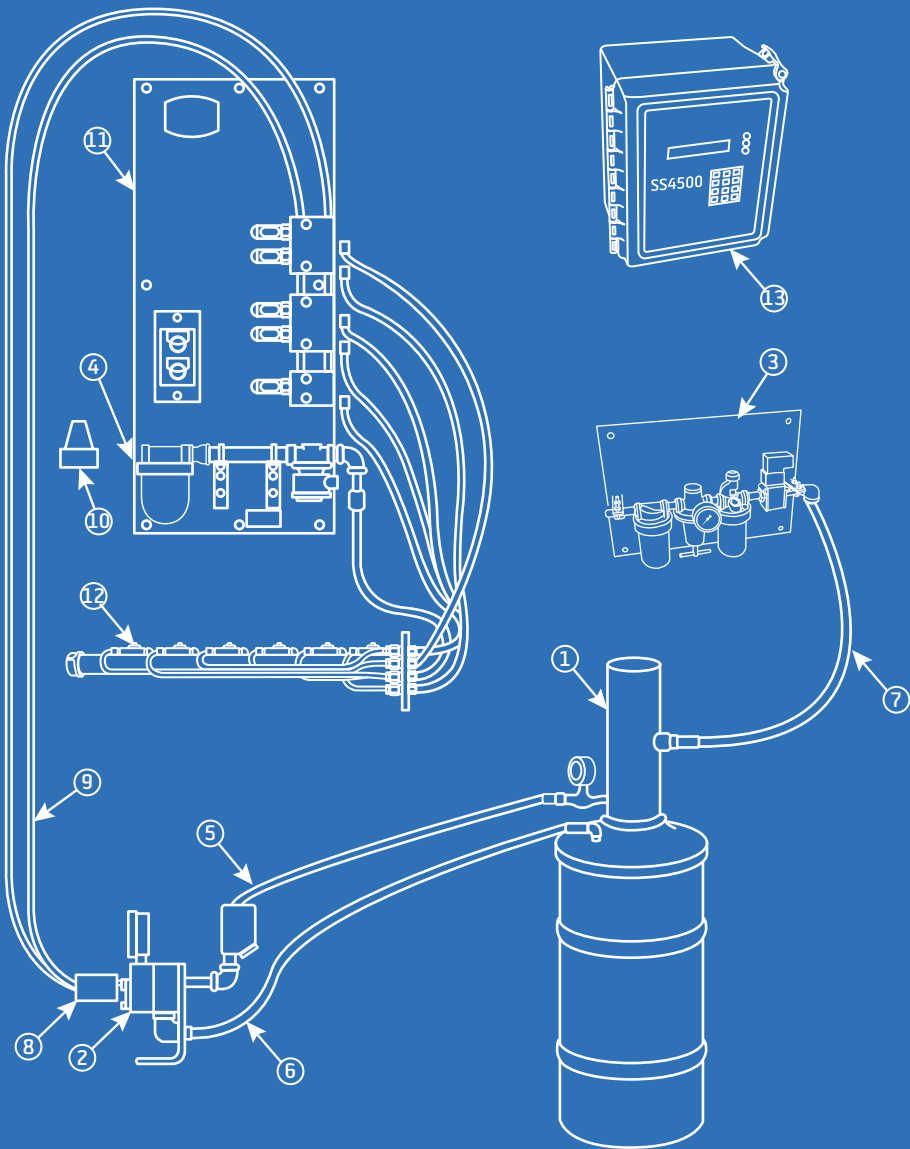

Item	Description	Part #
1	120 lb Air-operated barrel pump	9120
2	Reversing valve	DR4-60A
3	Air control panel	LD-7767C-A1
4	Air pressure switch (not shown)	U-623
5	Lube supply hose kit (72")	200275
6	Relief hose kit (72")	200277
7	Air hose kit (72")	200325
8	2 way line checks	U-1929D
9	Supply line pipe or hose to panel	BY USER
10	Air regulator	F119-4G
11	Valve panel	LD-12361-VX
12	Spray lance	LD-9327-XXXXX
13	Timer control	SS4500

The 9120 pump for 120 pound drums is recommended where solvent cut-back lubricants are used. This will intentionally require frequent drum changes to prevent drying and hardening of the lubricant. The 9400 pump for 400 pound drums is available if drying and hardening of the lubricant is not a problem.

A U-623 pressure switch (item 4) is used to give warning of low pressure and is an optional feature.

All Central Pumping Stations are for 120 Volts, 60 Cycle, but other voltages and frequencies are available.

The U-1929D two way checks are needed only if the lubricants have fluid characteristics.

How to Order

Spray Panels

Spray Nozzles	Part #
1	LD-12361-V1
2	LD-12361-V2
3	LD-12361-V3
4	LD-12361-V4
5	LD-12361-V5
6	LD-12361-V6
7	LD-12361-V7

Spray Lance

Gear Face Width	Guard Width	Spray Nozzles	Part #
2"	4.5"	1	LD-9327-1020S
3"	5.5"	1	LD-9327-1030S
4"	6.5"	1	LD-9327-1040S
5"	7.5"	1	LD-9327-1050S
6"	8.5"	1	LD-9327-1060S
7"	9.5"	2	LD-9327-2070S
8"	10.5"	2	LD-9327-2080S
9"	11.5"	2	LD-9327-2090S
10"	12.5"	2	LD-9327-2100S
11"	13.5"	2	LD-9327-2110S
12"	14.5"	3	LD-9327-3120S
13"	15.5"	3	LD-9327-3130S
14"	16.5"	3	LD-9327-3140S
15"	17.5"	3	LD-9327-3150S
16"	18.5"	3	LD-9327-3160S
17"	19.5"	4	LD-9327-4170S
18"	20.5"	4	LD-9327-4180S
19"	21.5"	4	LD-9327-4190S
20"	22.5"	4	LD-9327-4200S
21"	23.5"	4	LD-9327-4210S
22"	24.5"	5	LD-9327-5220S
23"	25.5"	5	LD-9327-5230S
24"	26.6"	5	LD-9327-5240S
25"	27.5"	5	LD-9327-5250S
26"	28.5"	6	LD-9327-6260S
27"	29.5"	6	LD-9327-6270S
28"	30.5"	6	LD-9327-6280S
29"	31.5"	6	LD-9327-6290S

Gear Face Width	Guard Width	Spray Nozzles	Part #
30"	32.5"	6	LD-9327-6300S
31"	33.5"	6	LD-9327-6310S
32"	34.5"	7	LD-9327-7320S
33"	35.5"	7	LD-9327-7330S
34"	36.5"	7	LD-9327-7340S
35"	37.5"	7	LD-9327-7350S
36"	38.5"	7	LD-9327-7360S
37"	39.5"	7	LD-9327-7370S
38"	40.5"	8	LD-9327-8380S
39"	41.5"	8	LD-9327-8390S
40"	42.5"	8	LD-9327-8400S
41"	43.5"	8	LD-9327-8410S
42"	44.5"	8	LD-9327-8420S

When ordering Spray Panels, specify by name, number of spray nozzles and part number, e.g. Spray Panel, 3 Spray Nozzles, **Part #LD-12361-V3**.

When ordering Spray Lance, specify by name, gear face width and part number, e.g. Spray Lance, 8" Gear Face Width, **Part #LD-9327-2080S**.

Innovators of engineered lubrication technology **since 1923**

Bijur Delimon International has ISO 9001:2000 and ISO 14001:2000 quality certified manufacturing facilities around the world, so your centralized lubrication system meets the highest industry quality standards. It's all part of our commitment to quality and customer service.



BIJUR DELIMON NORTH AMERICA
2685 Airport Road
Kinston, NC 28504

(252) 527 6001 **LOCAL**
(800) 227 1063 **TOLL-FREE**
(252) 527 3533 **FAX**

WWW.BIJURDELIMON.COM

DL29 • R2 05/08